
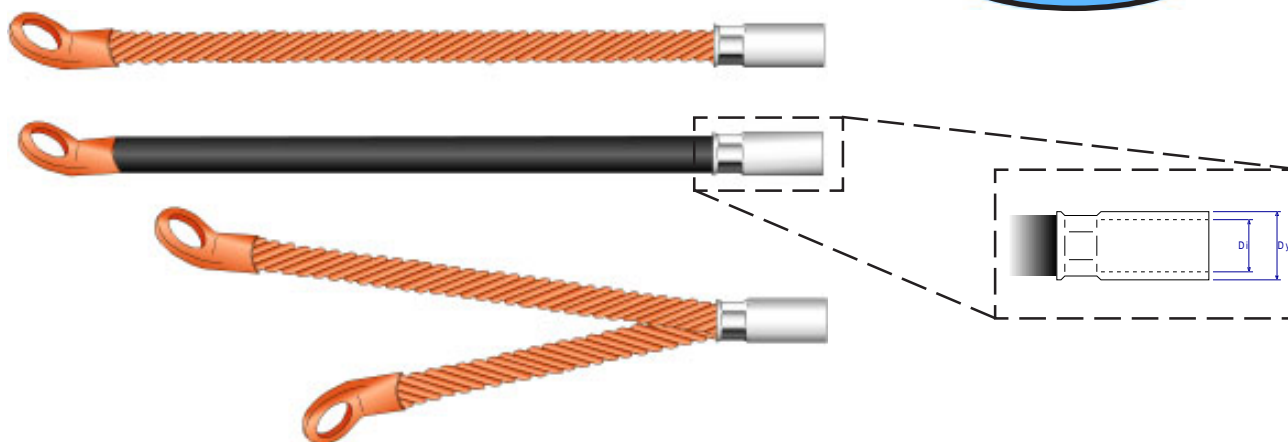


## Förlängningsledningar, *Koppar* Extension bonds, *Cu*

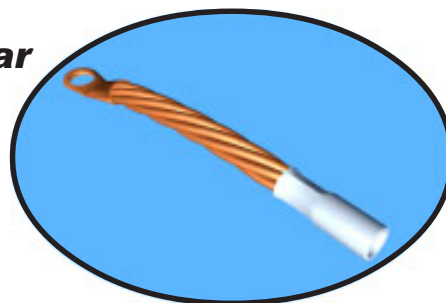

Area (mm <sup>2</sup> )	Längd (mm) Length (mm)	SAFE nr. SAFE No.	BV nr.	Di / Dy	Vinkel Angle	Isolerad Isolated	Antal/förp. Qty/pack.	Rek. Lodpinne Rec. Braze pin	För pressning till: For cable size:
3/16 in.	120	SAFE 3273	-	5,5 / 8,5	10°	phosphor branze	100	SAFE 10011	3/16 in.
25	330	SAFE 3010	0420205	6,5 / 12	10°		50	SAFE 10011	Ø6/16mm <sup>2</sup>
25	800	SAFE 3011	-	6,5 / 12	10°		50	SAFE 10011	Ø6/16mm <sup>2</sup>
25	330	SAFE 3056	0420204	8 / 11	10°		50	SAFE 10011	25mm <sup>2</sup>
2x16	95	SAFE 3040	-	7 / 12	40°		50	2 x SAFE 10011	Ø6/16mm <sup>2</sup>
35	150	SAFE 3029	-	9 / 13	10°		50	SAFE 10101	35mm <sup>2</sup>
35	300	SAFE 3019	-	9 / 13	60°		50	SAFE 10131	35mm <sup>2</sup>
50	310	SAFE 3013	0420206	8,5 / 12	10°		50	SAFE 10101	Ø8mm
50	200	SAFE 3007	-	11 / 14,5	60°		50	SAFE 10131	50mm <sup>2</sup>
50	300	SAFE 3008	0420207	11 / 14,5	10°		50	SAFE 10101	50mm <sup>2</sup>
2x25	72	SAFE 3053	-	8,5/12	40°		50	2 x SAFE 10011	25-35mm <sup>2</sup>
2x25	72	SAFE 3051	-	11/14,5	40°		50	2 x SAFE 10011	50mm <sup>2</sup>
2x25	165/115	SAFE 3041	-	11 / 14,5	40°		50	2 x SAFE 10011	50mm <sup>2</sup>
50	240	SAFE 3004	-	8,5 / 11	10°		50	SAFE 10131	Ø8mm
50	150	SAFE 3006	-	11 / 14	60°		50	SAFE 10101	50mm <sup>2</sup>
50	200	SAFE 3007	-	11 / 14	60°		50	SAFE 10131	50mm <sup>2</sup>
50	350	SAFE 3009	-	11 / 14	10°	X	25	2 x SAFE 10011	50mm <sup>2</sup>
2x35	170/120	SAFE 3048	-	13 / 17	10°		50	2 x SAFE 10101	70mm <sup>2</sup>
2x35	400/340	SAFE 3047	0420208	13 / 17	10°		25	2 x SAFE 10101	70mm <sup>2</sup>
95	400	SAFE 3198	-	15 / 20	60°	X	-	2 x SAFE 10131	95mm <sup>2</sup>

Förlängningsledningar används till pressning i ena ändan på befintlig kabel och pinnlödning i andra ändan. Kabeln är av flexibel typ.

*The cable is very flexible, on one end the cable is fixed by pin brazing, on the other end by pressing.*